

Champion Series

Reinforcement Loudspeaker system

C 14 & C 14S

**“Hitting you right
between the ears!”**

C 14 Sub bass cabinet

The C 14 Champion is a compact, high power Sub bass cabinet designed to extend the frequency response of the C 24 and C 27 loudspeaker cabinets down to 45 Hz.

In combination with the C 29, the response from 45 - 100 Hz will increase significantly.

Available with (C 14S) or without (C 14) protective hardware, this appealing system can be used in almost any situation.

The C 14 (left) and the C 14S (right) Champion.

Sub bass cabinets with excellent specifications.

Featuring

- High acoustic output;
- Compact design;
- Equipped with two SA 1513 long excursion drivers;
- Unequalled low end response;
- Roadproof in flight case version.



stage accompany

The Champion for superior performance!

For absolute top-quality sound reproduction, DDC (Dynamic Damping Control) wiring is standard to form a perfect match with the SA PPA 1200, the SA 800 and the SA 1600.

The C 14 is constructed around our reliable 15" low-frequency loudspeaker and sets a new standard for sound quality and power for this type of speaker system. It delivers an incredible tight and punchy bass and has a power rating of 800 W RMS.

The Champion; clever design!

The construction of the Champion is well-considered in every possible aspect. For example, often, recessed handles vibrate with the music. Using silicon paste settles with these



irritating noises. Special fixtures called "Dolfies[®]" are used for rock-stable stacking. The optional front cover protection and castor set accommodate maximum protected transportation.



Application

When used in combination with the C 24 and C 27, we recommend using an active crossover set at 100 Hz, for example the SA X 60A.

Maximal performance will be obtained because there is no passive filter inside the C 14.

When used in combination with the C 29, we again recommend using an active crossover. This time preferably set at 70 Hz.

Physical dimensions of the C 14.

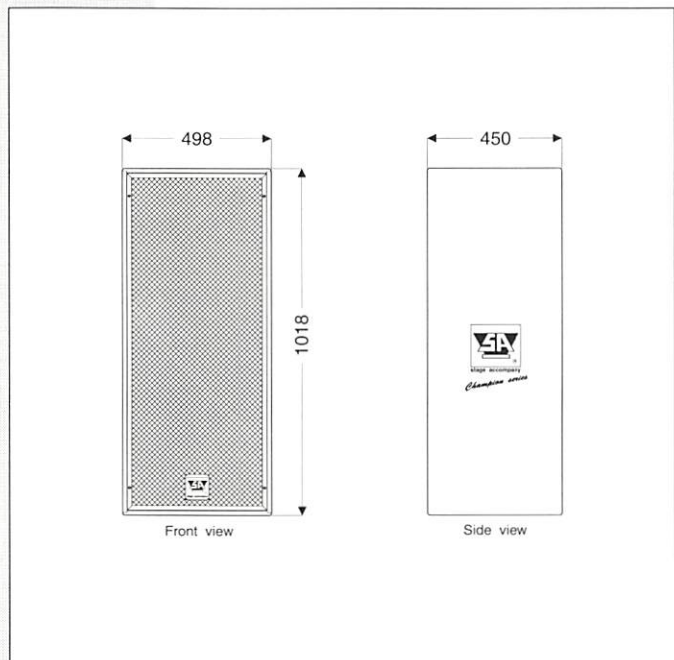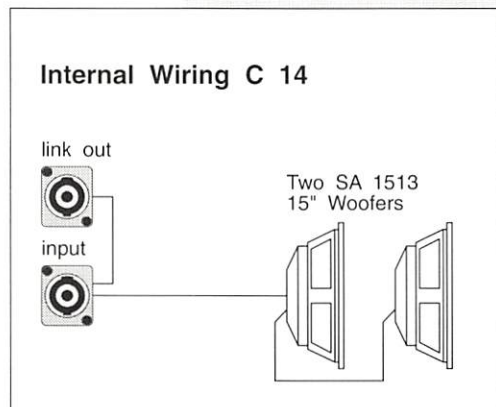

Technical specifications C 14 & C 14S

Frequency response:	45 Hz - 100 Hz +/- 3 dB
Driver complement:	Two SA 1513 LF drivers
Nominal impedance:	4 Ohms (system)
Sensitivity:	99 dB, @ 1 W 1 meter
Max. Program power:	800 Watts
Max. Peak power:	2000 Watts (200 ms)
Enclosure:	Vented, multi-ply birchwood
Finish:	Blue, other colours on request
Protective grill:	Expanded metal screen
Connectors:	In, Link out: 4 pin Speakons
Physical dimensions C 14:	1018 x 498 x 450 mm (hxwxd)
C 14S:	1023 x 503 x 467 mm (hxwxd)
	Castors: add 130 mm to depth
H x V dispersion	330° x 160°
Weight:	C 14: 50 kg; C 14S: 57 kg
Options:	Stand adaptor, castor set, flight case, front cover, flyer system.



Stage Accompany reserves the right to alter specifications without prior notice.