

SA Performer series

SA 4829 full range cabinet

Reinforcement Loudspeaker

Technical Specifications


SA 4829 full range cabinet

The SA 4829 is a compact, high-power full range cabinet capable of producing high sound pressure levels with very low distortion. This is achieved by using two SA 1502 15" low-mid drivers and the SA 8526 Compact Driver.

Available options:

- Flightcased version;
- Dolly for transportation including castors;
- Tube stand adaptor for Performer series subwoofer cabinets;
- Rigging system.

Each of these options may be ordered separately.

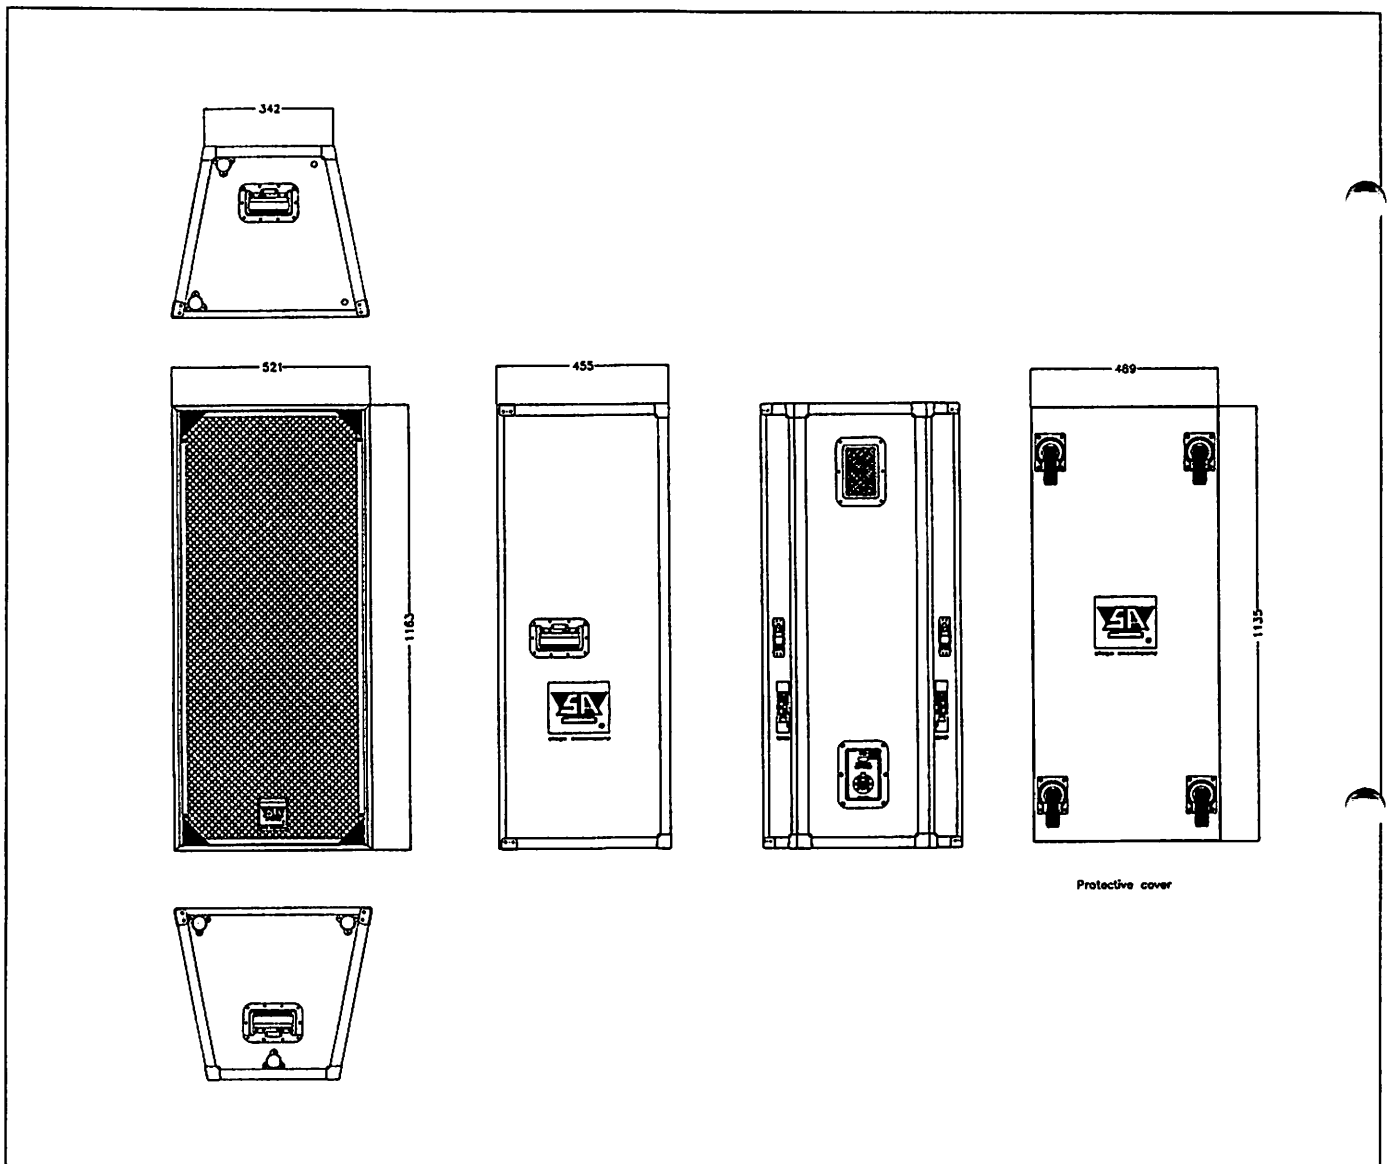

Physical dimensions of the SA 4829; flightcased version. The protective cover/dolly for transportation is shown at the right side.

- High acoustic output
- Compact rugged design
- Equipped with two SA 1502 high efficiency drivers and the SA 8526 Compact Driver
- Unequaled transient response
- Road-proof in cased version
- Prepared for use with SA 4817 subwoofer through position plates (cased version)



stage accompany

SA Performer series

SA 4829 full range cabinet


Reinforcement Loudspeaker

Technical Specifications

Technical specifications

Frequency response:	60 Hz - 32 kHz +/- 3 dB
Driver complement:	Two SA 1502 LF drivers; One SA 8526 Compact Driver
Nominal impedance:	4 Ohms LF driver (parallel) 5 Ohms HF driver
Low-mid sensitivity:	101 dB, @ 1 W 1 meter
High sensitivity:	99 dB, @ 1 W 1 meter
Low-mid max. RMS power:	300 Watts
High max. RMS power:	120 Watts
Low-mid max. peak power:	2000 Watts (200 ms)
High max. peak power:	1000 Watts (200 ms)
Enclosure:	Vented, multi-ply birchwood

Finish:	Blue, other colours on request
Physical overall dimensions:	1158 x 516 x 450 mm (hwxwd)
Flightcased version:	1163 x 521 x 455 mm (hwxwd)
Including castors:	add 130 mm to depth
Weight:	58 kg + 5 kg for flightware + 9 kg for dolly with castors + 5,5 kg for flyer system
Protective grill:	Expanded metal screen
Connector:	Neutrik 8 pin Speakon
Rigging (optional):	Aircraft snap-lock strips

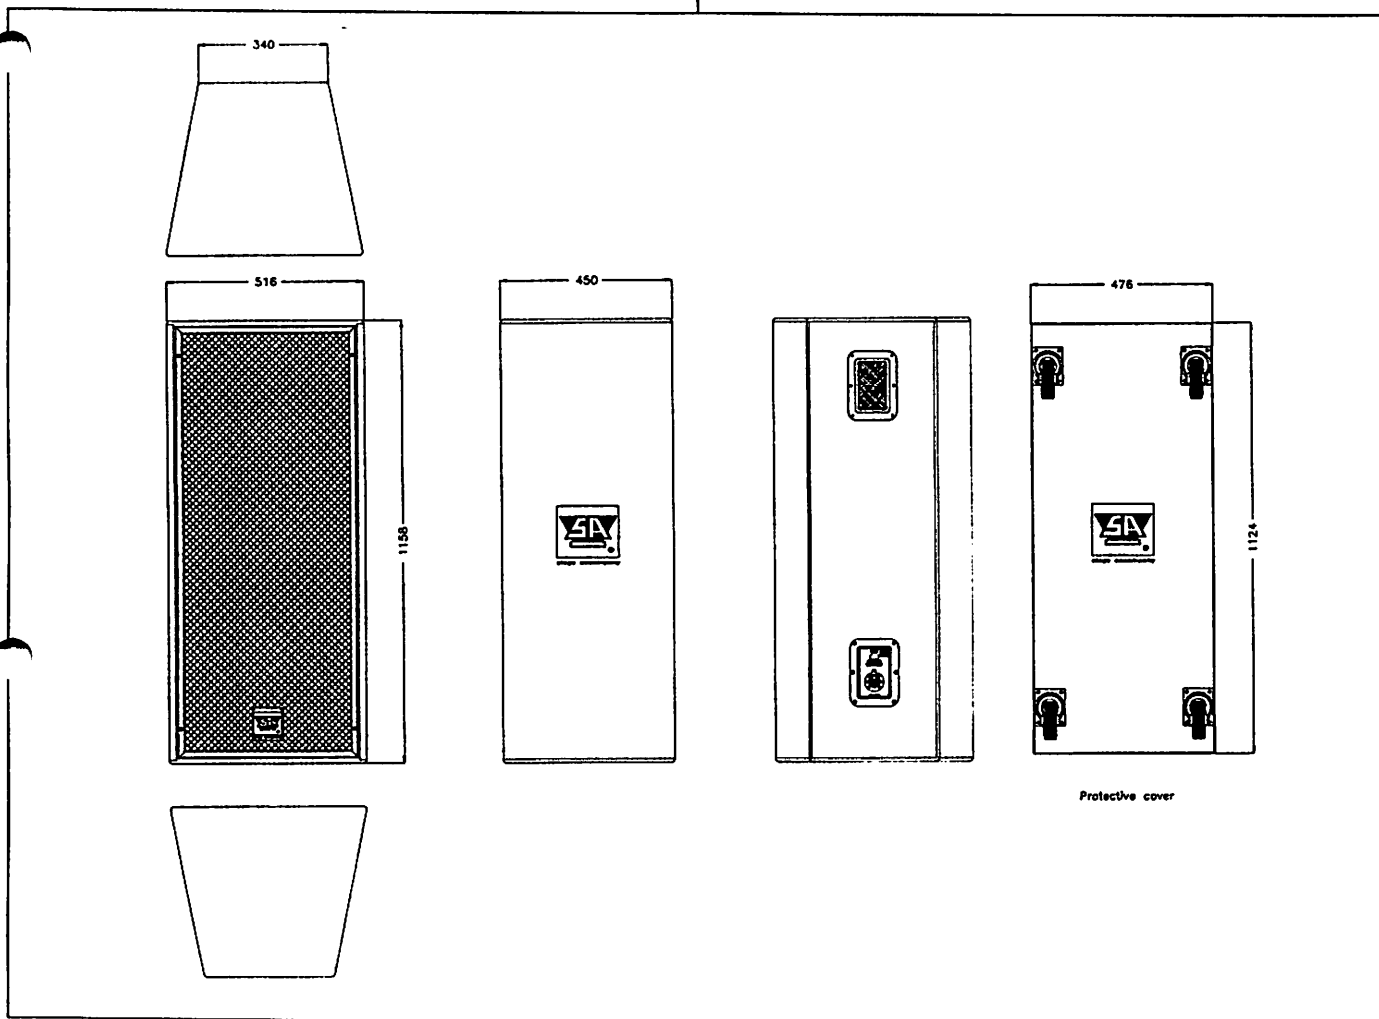

Physical dimensions of the SA 4829; normal version. The protective cover/dolly for transportation is shown at the right side.



stage accompany

Stage Accompany B.V.

Anodeweg 4
1627 LJ Hoorn
The Netherlands
Phone: (0)2290 - 12542
Fax: (0)2290 - 11192
Telex: 37989 stage nl