

Leader Series

Monitor Loudspeaker system

L 27

“Transparency on stage!”

L 27 Leader series monitor

The L 27 “Leader” is a passive loudspeaker cabinet of a totally new generation. Constructed around our reliable 15" low-frequency loudspeaker and unique Compact Driver, it sets a stunning new standard for sound quality and power in this type of speaker system. In fact sound quality is so good that it easily exceeds quality of many widely used studio monitor systems. Available with or without custom designed flight case, this good looking system can be used in almost any situation.

The Leader for superior clarity!

By using the Compact Driver, the Leader provides true Super-HiFi quality in a compact and portable system. A constant directivity horn coupled to the Compact Driver offers smooth, controlled dispersion of 70° from 1 KHz up.

The L 27 Stage Monitor

Castors mounted on the optional dolly facilitate transportation (not shown).

Featuring

- High acoustic output;
- Compact design;
- Equipped with the SA 1502 high efficiency driver and the SA 8526 Compact Driver;
- Unequalled transient response;
- Neodymium SA 8535 Compact Driver as an option.



stage accompany



The L 27, a real world Leader, is fitted with a 8526 Compact Driver and one 1502 woofer. It delivers an incredible transparent sound and has a power rating of 300 W RMS.

DDC

For absolute top-quality

sound reproduction, DDC (Dynamic Damping Control) wiring is standard to form a perfect match with the PPA-1200 Champ-amp. This programmable power amplifier has factory programmed presets to optimise performance for, amongst others, the L 27. In combination with


DDC this results in an even tighter and brighter sound.

The Leader; clever design!


The construction of the Leader is well-considered in every possible aspect. Often, recessed handles vibrate with the music. Using silicon paste settles with these irritating noises.

The optionally available flight case offers maximum protection for two Leaders during transportation. The series has two more models; the L 24 and the L 26, both are constructed with the same features as the L 27 though with slightly different applications. The Leaders are able to improve your performance!

The frequency response of the L 27.

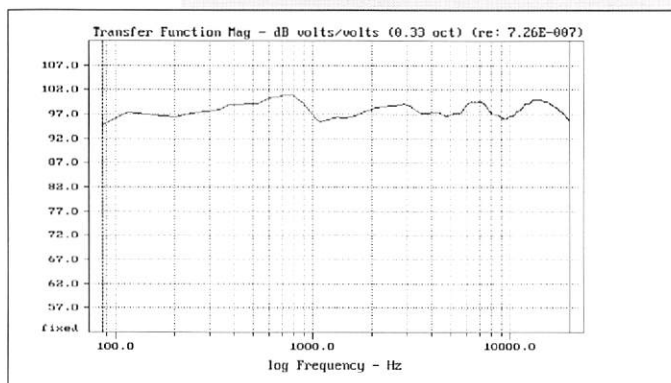

Physical dimensions of the L 27.

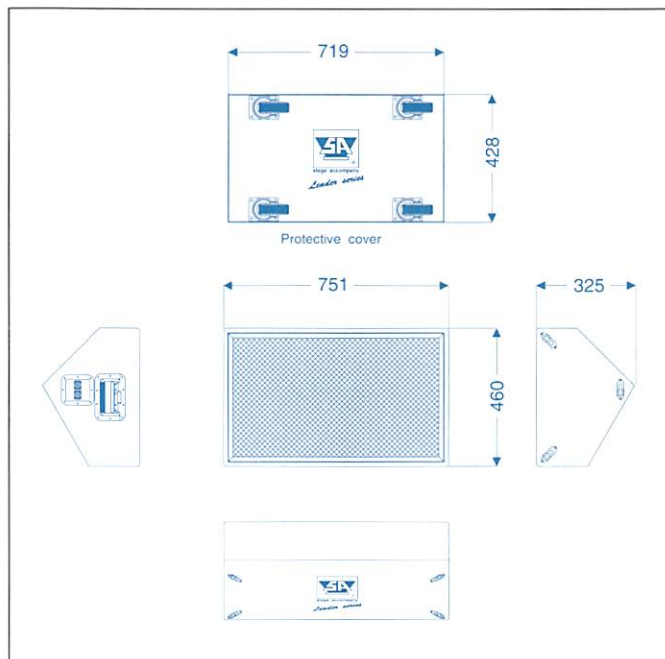


The L 27 is equipped with the Compact Driver.


Shown here: The new SA 8535 Neodymium Compact Driver.

Standard mounted: the SA 8526.

On request the SA 8535.

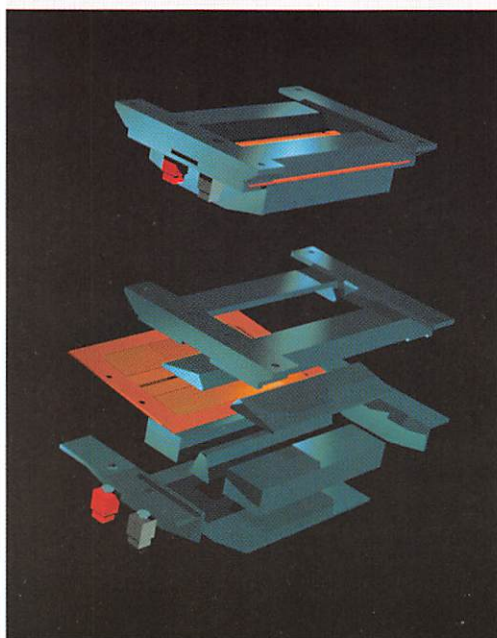

Internal Wiring L 27

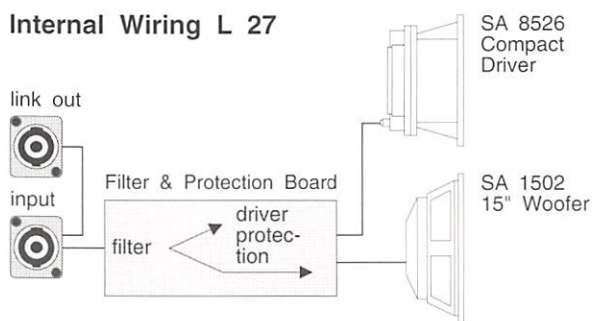

Technical specifications L 27

Frequency response:	70 Hz - 32 kHz +/- 3 dB
Driver complement:	One SA 1502 LF driver One SA 8526 Compact Driver
Nominal impedance:	8 Ohms (system)
Sensitivity:	99 dB, @ 1 W 1 meter
Max. RMS power:	300 Watts
Max. Peak power:	1000 Watts (200 ms)
Enclosure:	Vented, multi-ply birchwood
Finish:	Blue, other colours on request
Protective grill:	Expanded metal screen
Connectors:	In, Link out: 4 pin Speakons
Physical overall dimensions:	751 x 460 x 325 mm (hxwx d)
Flight case (2xL 27):	796 x 495 x 710 mm (hxwx d) Castors: add 130 mm to height
H x V dispersion (2 kHz)	70° x 30°; Note: the Compact Driver may be mounted horizontal or vertical
Weight:	42 kg (32 kg with SA 8535 Neodymium Compact Driver)
Options:	Dolly, flight case, front cover, flyer system, extra handles.

Stage Accompany reserves the right to alter specifications without prior notice.



stage accompany

Stage Accompany B.V.
Anodeweg 4
1627 LJ Hoor
The Netherlands
Phone: +31 (0)2290 - 12542
Fax: +31 (0)2290 - 11192