

SA Performer series

SA 4824 full range cabinet

Reinforcement Loudspeaker

Technical Specifications


SA 4824 full range cabinet

The SA 4824 is a compact, high-power full range cabinet capable of producing high sound pressure levels with very low distortion. This is achieved by using the SA 1202 12" low-mid driver and the SA 8526 Compact Driver.

Available options:

- Flightcased version;
- Dolly for transportation including castors;
- Tube stand adaptor for Performer series subwoofer cabinets;
- Rigging system.

Each of these options may be ordered separately.

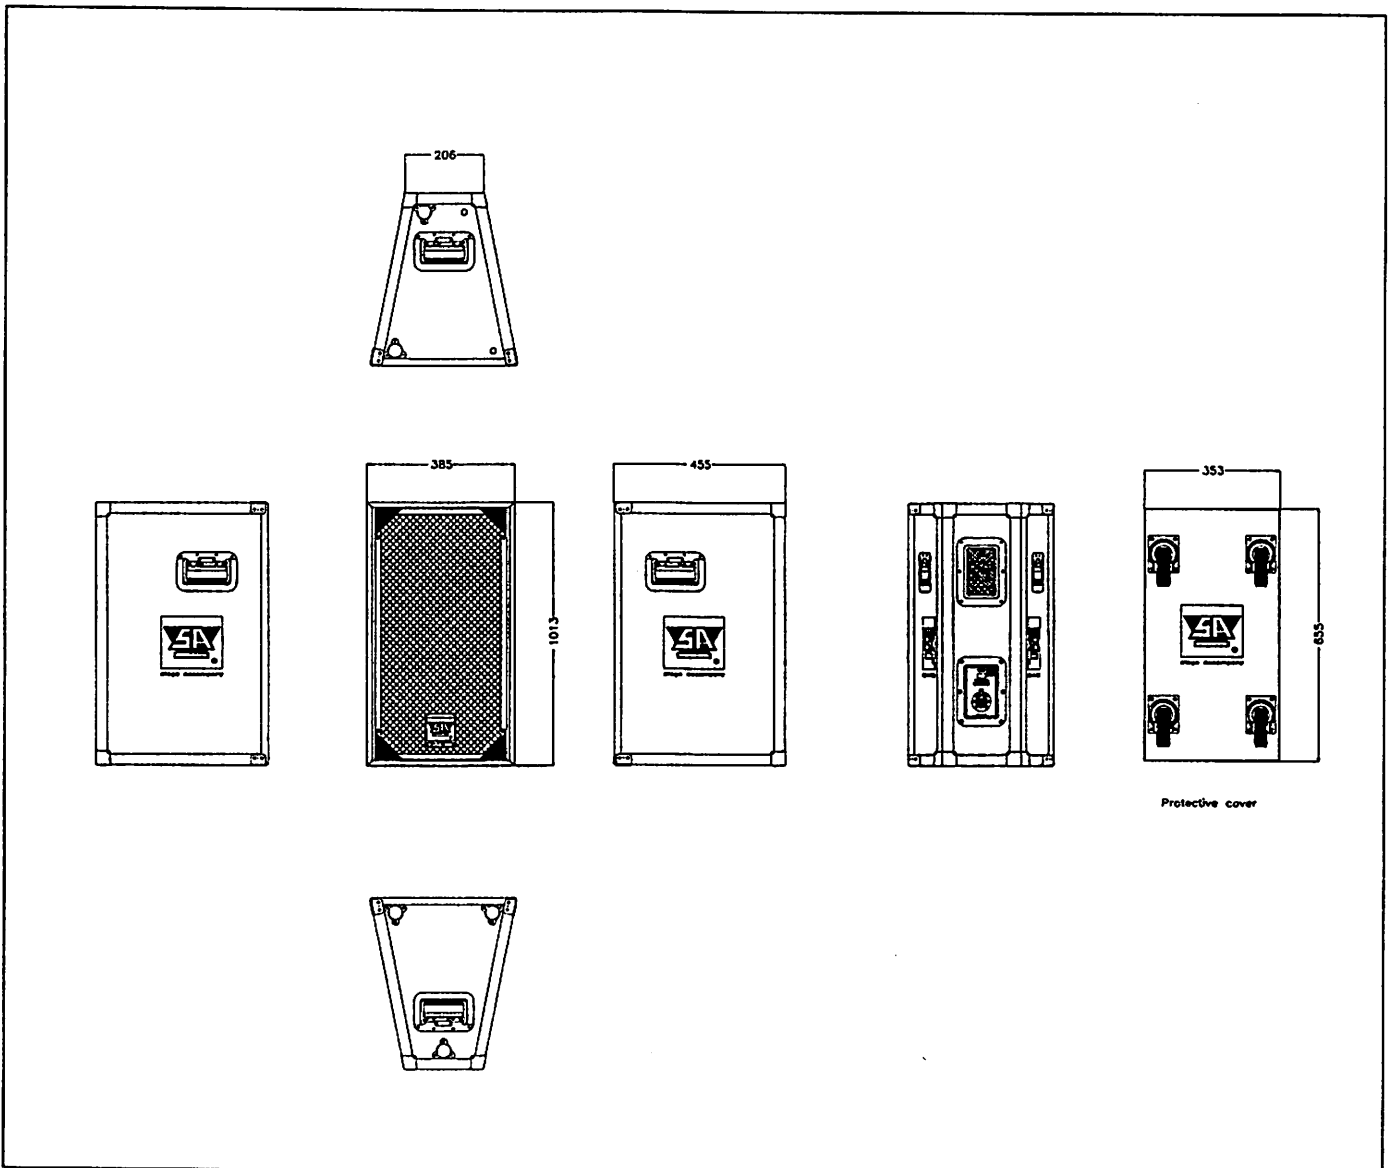

Physical dimensions of the SA 4824; flightcased version. The protective cover/dolly for transportation is shown at the right side.

- High acoustic output
- Compact rugged design
- Equipped with the SA 1202 high efficiency driver and the SA 8526 Compact Driver
- Unequalled transient response
- Road-proof in cased version
- Prepared for use with the SA 4816 subwoofer through position plates (cased version)



stage accompany

SA Performer series

SA 4824 full range cabinet


Reinforcement Loudspeaker

Technical Specifications

Technical specifications

Frequency response:	80 Hz - 32 kHz +/- 3 dB
Driver complement:	One SA 1202 LF driver; One SA 8526 Compact Driver
Nominal impedance:	8 Ohms LF driver 5 Ohms HF driver
Low-mid sensitivity:	98 dB, @ 1 W 1 meter
High sensitivity:	99 dB, @ 1 W 1 meter
Low-mid max. RMS power:	150 Watts
High max. RMS power:	120 Watts
Low-mid max peak power:	1000 Watts (200 ms)
High max. peak power:	1000 Watts (200 ms)
Enclosure:	Vented, multi-ply birchwood

Finish:	Blue, other colours on request
Physical overall dimensions:	678 x 380 x 450 mm
Flightcased version:	683 x 385 x 455 mm
Including castors:	add 130 mm to depth
Weight:	43 kg + 4,5 kg for flightware + 6,5 kg for dolly with castors + 4,5 kg for flyer system
Protective grill:	Expanded metal screen
Connector:	Neutrik 8 pin Speakon
Rigging (optional):	Aircraft snap-lock strips

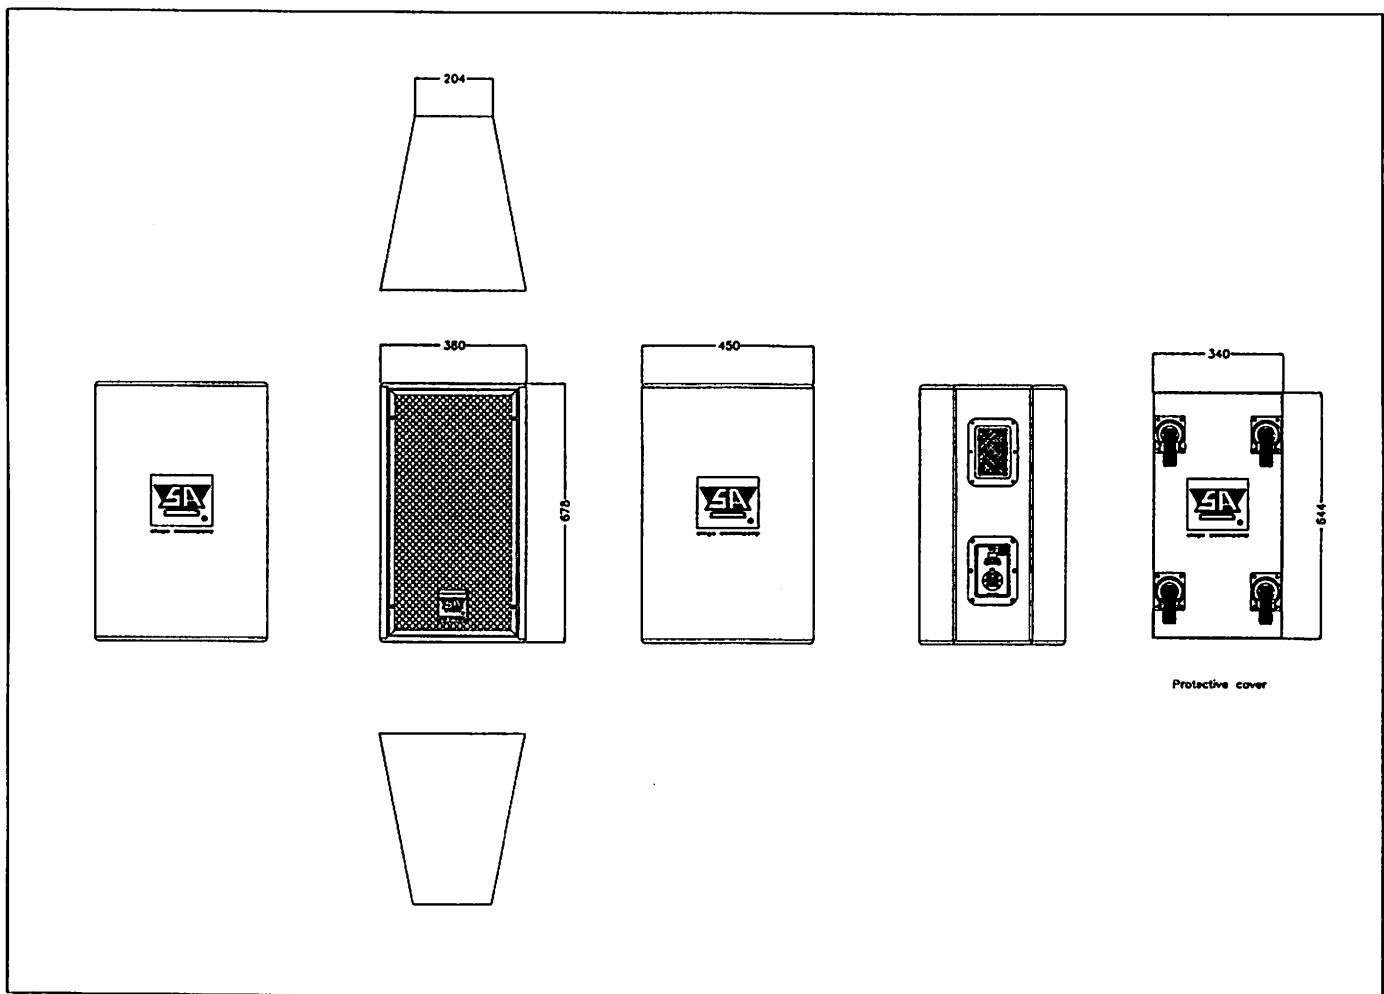

Physical dimensions of the SA 4824; normal version. The protective cover/dolly for transportation is shown at the right side.



stage accompany

Stage Accompany B.V.

Anodeweg 4

1627 LJ Hoorn

The Netherlands

Phone: (0)2290 - 12542

Fax: (0)2290 - 11192

Telex: 37989 stage nl